



TRANSFORMING PITS INTO A LAKE DISTRICT

Mine reclamation for pit lakes

It is no secret that the mining industry can have severe consequences for mining regions and the surrounding landscape. Vegetation and wildlife can be negatively impacted when mining production is abandoned. Rehabilitating old mining areas can be an immensely difficult challenge and few succeed at it. However, with the right strategies and tools, abandoned mining pits can be turned from lifeless landscapes into prosperous man-made lake districts. This is what has been done in Germany, where we provided accurate analyses and appropriate strategies for creating a new pit lake.

The project site was located within enormous industrial mining zones, where lignite has been mined and used for electricity generation. Although mining activities were still ongoing and three large power stations continued to produce electricity, much of the industrial mining activities were planned to be phased out by 2015. A number of old pits left behind by the mining process had already been transformed into a new landscape, creating a massive new lake district never before seen in this region. In connection with the development of a new pit lake with a surface area of approximately 19 km², our client contacted us to optimise the mine closure plan through accelerated flooding of the pit lakes.

CLIENT

A leading European energy company providing electricity and heat.

CHALLENGE

- Need to develop a sustainable mine closure strategy for pit lakes
- Need to rapidly fill pit lakes using surface water, whilst maintaining appropriate river flows at the same time

SOLUTION

An integrated groundwater and surface water model capable of predicting a reliable strategy for rapid filling of the mine pits.


VALUE

- Reliable prediction of the river flows that could be sustainably diverted into the pit
- Reduction of pit flooding time frame by seven years from the original mine closure plan


SOFTWARE USED

FEFLOW

MIKE HYDRO River

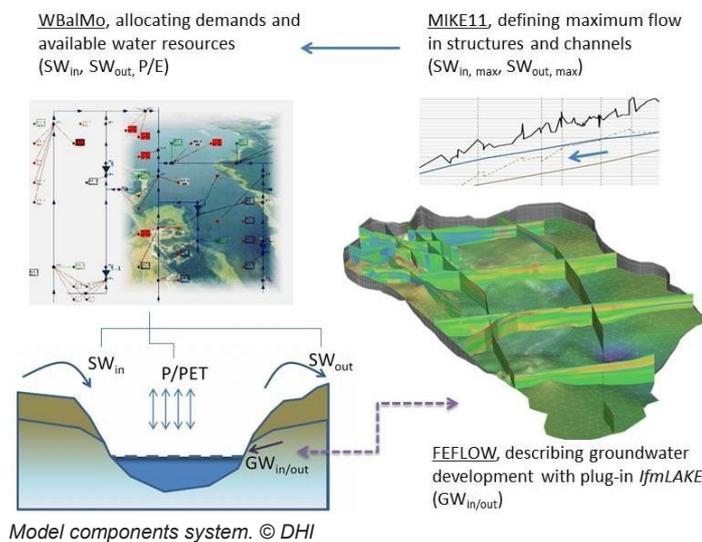

This project was carried out by the client using MIKE Powered by DHI software.

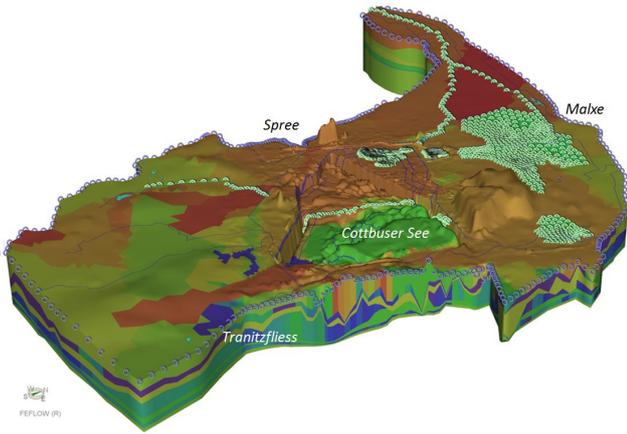


Overview of FEFLOW 3D groundwater model with applied conductivities and boundary conditions. © DHI

We used the following modelling components:

- a 3D FEFLOW groundwater model
- a MIKE HYDRO River (previously MIKE 11) surface water model to describe different options for the outflow to river Spree
- a WBaMo water and allocation model to identify long-term and optimal water allocations

Using FEFLOW and MIKE HYDRO River, we were able to describe the water level development of the lake. This was done with detailed information about the inflow into the lake (groundwater inflow, surface water inflow, as well as rainfall and evaporation at the surface).

In addition to the inflow into the lake, it was important to obtain detailed information about the long-term water needs as well as the water availability of the Spree river. We used a water management and allocation tool for the long-term management analyses of the pit lake. In addition, we also used MIKE Hydro River for the 1D hydrodynamic analysis of maximum flows and the planned diversions in the Spree as well as its tributaries.

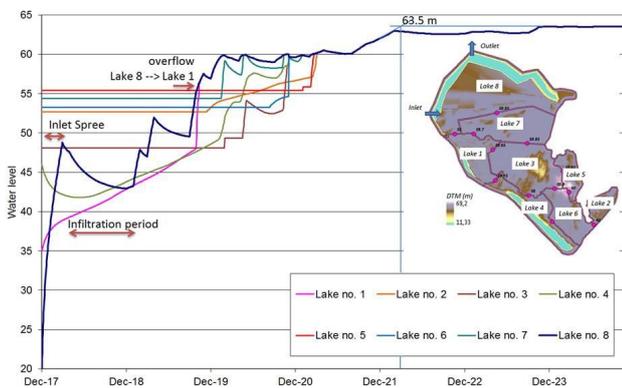

Water level development within single lake basins with additional water inlet © DHI

REDUCING THE FLOODING PERIOD

The challenge was to provide the right strategy for filling up the lake in a reasonably short period of time. This had to be done while maintaining acceptable environmental flows within the river system used to source the additional surface water required. We concluded that the time required to complete the filling of pit lake could be reduced significantly by using a strategy that included additional surface water inflow. The results showed that it will take approximately five years to fill up the lake to a level of +63.5 m Above Mean Sea Level (AMSL) by using additional surface water inflow from river Spree. This means that the lake filling will be finished by around 2023. This period is more than 10 years shorter than the flooding period without additional surface water inflow and about seven years shorter than previous mine closure plans estimated.

PRECISE, INTEGRATED AND RELIABLE MODELLING PROVES ESSENTIAL

In order to achieve these results, it was essential to use integrated groundwater and surface water modelling.

Contact: info@dhigroup.com

For more information, visit: www.dhigroup.com